
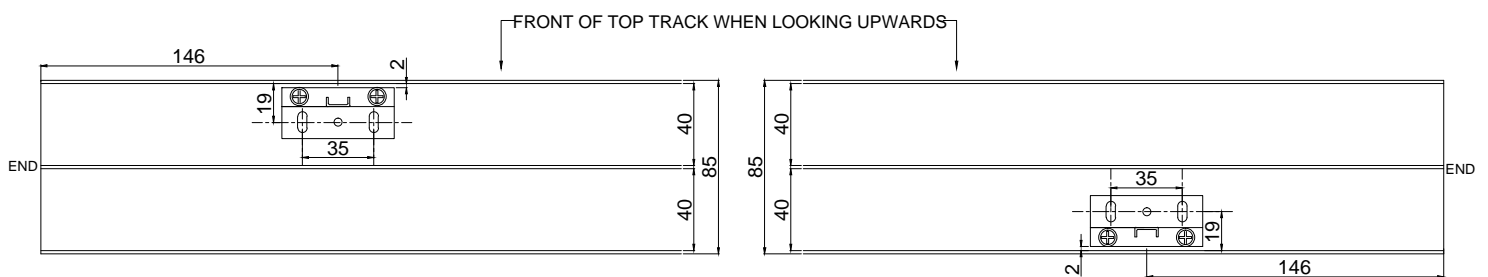
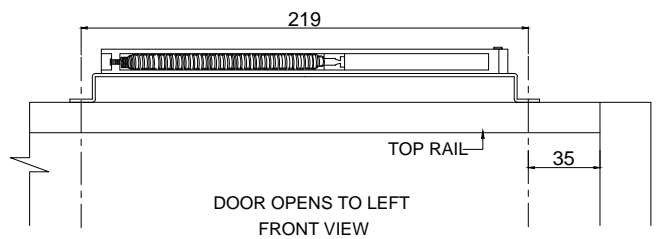
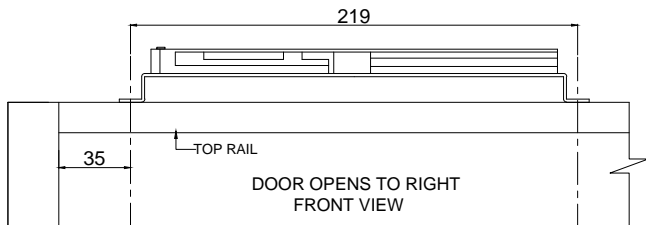
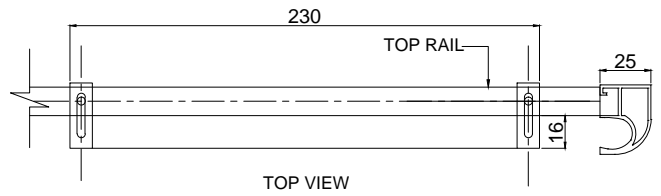


SOFT CLOSE MOUNTED ON A 900 SERIES DOOR

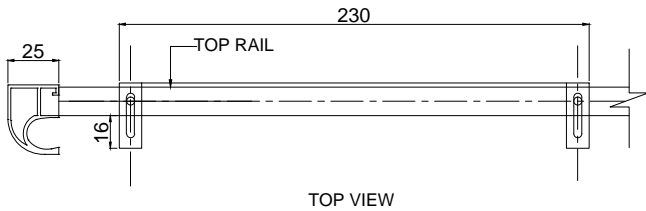

INSTALLATION

- FIT ACTIVATOR IN TO TOP TRACK ACCORDING TO LEFT OR RIGHT OPENING
- PRIME THE SOFT CLOSE CLAW (SPRING STRETCHED) BEFORE INSTALLING DOOR
- INSTALL DOOR AND WIND UP BOTH BOTTOM WHEELS ON DOOR UNTIL SLACK ON THE ADJUSTER BOLT IS TAKEN UP (USE 5mm ALLEN KEY)
- IF THE ACTIVATOR DOES NOT ENGAGE, WIND WHEEL UP (CLOCKWISE) UNTIL IT DOES AND THEN A FEW MORE TURNS FOR POSITIVE ENGAGEMENT.
- ENSURE THE SOFT CLOSE IS PRIMED AFTER ANY ADJUSTMENT.