
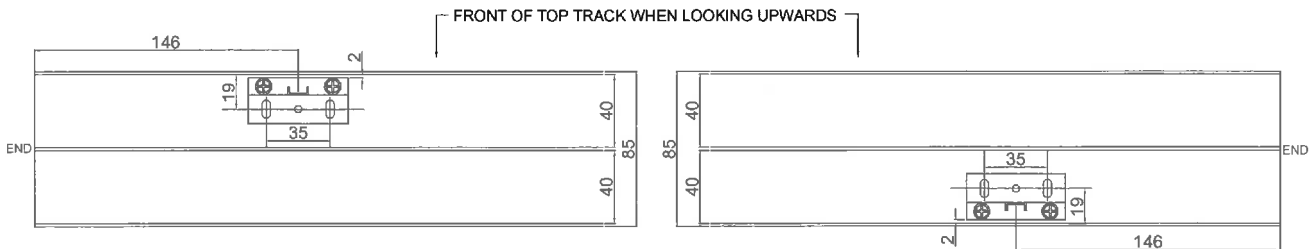


SOFT CLOSE MOUNTED ON A 700 SERIES DOOR

WHEELS OMITTED
FOR CLARITY

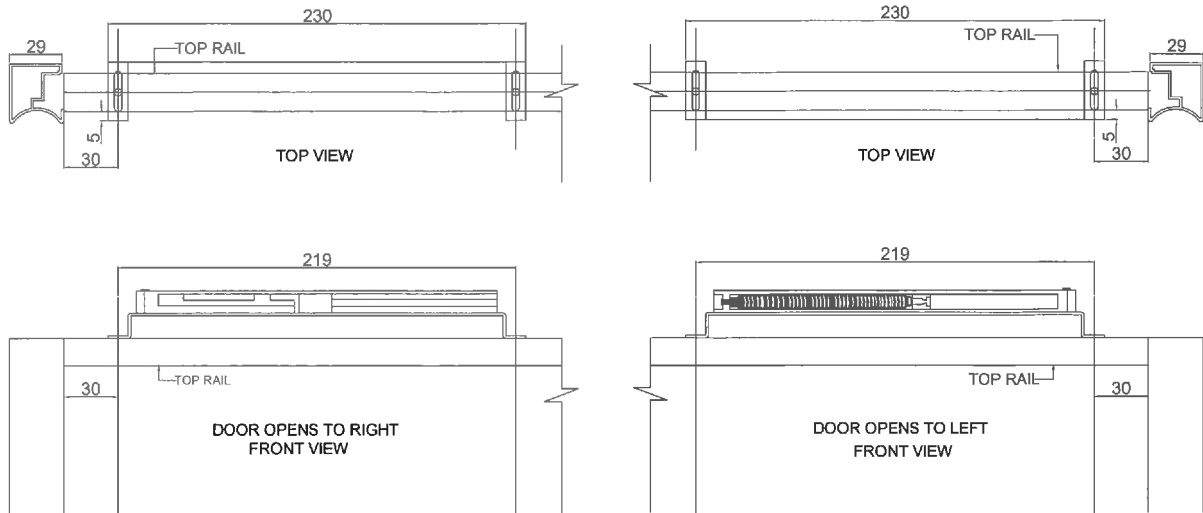

INSTALLATION

FIT ACTIVATOR IN TO TOP TRACK ACCORDING TO LEFT OR RIGHT OPENING
 PRIME THE SOFT CLOSE CLAW (SPRING STRETCHED) BEFORE INSTALLING DOOR
 INSTALL DOOR AND WIND UP BOTH BOTTOM WHEELS ON DOOR UNTIL SLACK ON
 THE ADJUSTER BOLT IS TAKEN UP (USE 5mm ALLEN KEY)
 IF THE ACTIVATOR DOES NOT ENGAGE, WIND WHEEL UP (CLOCKWISE) UNTIL IT DOES AND
 THEN A FEW MORE TURNS FOR POSITIVE ENGAGEMENT.
 ENSURE THE SOFT CLOSE IS PRIMED AFTER ANY ADJUSTMENT.