



SOFT CLOSE FITTING INSTRUCTIONS FOR SERIES 700

700 SERIES DOOR

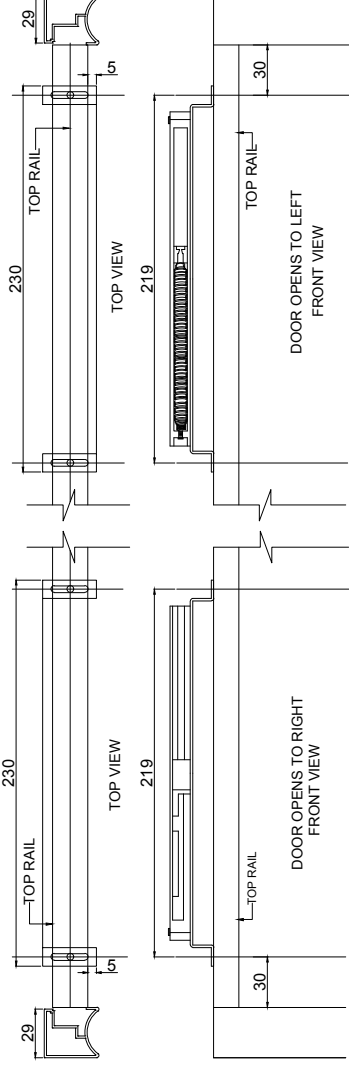


ACTIVATOR POSITION IN TOP TRACK -

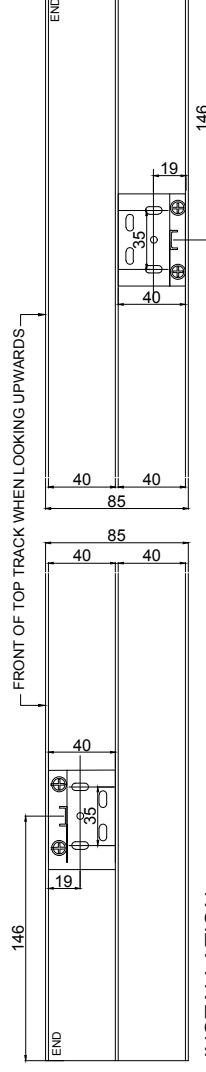

INSTALLATION:

FIT ACTIVATOR IN TO TOP TRACK ACCORDING TO LEFT OR RIGHT OPENING
 PRIME THE SOFT CLOSE CLAW (SPRING STRETCHED) BEFORE INSTALLING DOOR
 INSTALL DOOR AND WIND UP BOTH BOTTOM WHEELS ON DOOR UNTIL SLACK ON
 THE ADJUSTER BOLT IS TAKEN UP (USE 4mm ALLEN KEY)
 IF THE ACTIVATOR DOES NOT ENGAGE , WIND WHEEL UP (CLOCKWISE)
 UNTIL IT DOES AND THEN A FEW MORE TURNS FOR POSITIVE ENGAGEMENT.
 ENSURE THE SOFT CLOSE IS PRIMED AFTER ANY ADJUSTMENT.

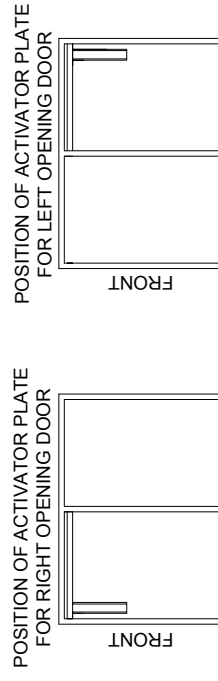

PACK CONTENTS -

- 1 X 40MM PLATE WITH 20MM PIN ATTACHED
- 1 X SPARE 14MM PIN TO BE USED IF EXTRA TOLERANCE IS REQUIRED
- 2 X DOME HEAD SCREWS